


National Applied Construction Products, Inc. • 800.633.4622 • Fax: 330.644.3557 • www.NACproducts.com

IMPORTANT: Proper installation of this Membrane System requires use of the appropriate Primers and Companion Products. Read and understand Install, Product Data (PDS) and Material Safety Data (MSDS) Sheets for all products prior to installation.

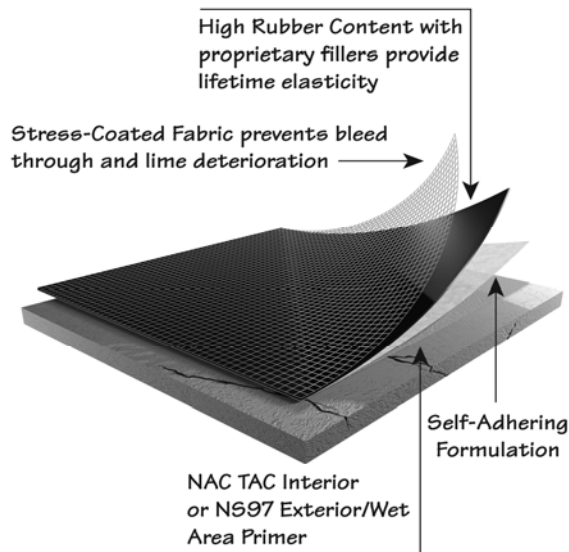

Advanced Crack Isolation with MVT Resistance

ECB™ 75 (90mil) Membrane is a value-priced alternative to ECB™, the original self-adhering crack isolation membrane. Packaged in 3' x 50' (915 mm x 15.24 mtr) rolls (150 sqft), ECB™ 75 (90mil) consists of a base layer of polymer modified elastomers permanently laminated to a unique "stress flex" fiber sheet to form a single, high performance, self-bonding membrane.

ECB™ 75 (90mil) is designed for use under floor surfaces that require protection from structural and thermal movement and will protect against Moisture Vapor Transmission (MVT) 10#/1000SF/24HRS when used with NAC TAC or NS97 Primer or 3#/1000SF/24HRS when used with NAC TAC II Primer. The membrane adheres permanently to the substrate.

ECB™ 75 (90mil) Membrane substantially reduces reflective cracking and delamination between the substrate and floor surface. Full floor coverage with 36" (915 mm) ECB™ 75 (90mil) will protect against 1/4" (6.4 mm) lateral substrate movement, and because it is a self-bonding system, it is easier to apply, and install faster than other systems. **Once applied, floor tile can be installed immediately, minimizing down time and labor cost.**

How It Works

The key to ECB™ 75's (90mil) effectiveness is in its two component design. The elastomeric base layer functions as a buffer, absorbing the thermal and structural movement of the substrate, while its unique "stress flex" fiber sheet accommodates A118.4 or better latex mortars, organic adhesives and epoxy setting materials. The adhesion and integrity of the tile floor are preserved by the "anti-fracture" action. NAC TAC, NAC TAC II or NS97 Primers are necessary components of the system (see page 2 for more information).

ECB™ 75 (90mil) Features and Benefits

- Suitable for interior and exterior use
- Meets ANSI A118.12 and ANSI A118.10
- Protects against reflective cracking and delamination
- Independent Sound Tested. IIC = 65 min STC=67 min
*Minimum IIC and STC Results based on 40mil ECB™75
- Safely covers asbestos flooring and provides an effective barrier against radon and mold
- Resists Moisture Vapor (MVT) 10#/1000SF/24HRS when used with NAC TAC or NS97 Primer or 3#/1000SF/24HRS when used with NAC TAC II Primer
- Eliminates need to cut tile to meet control/cold joints
- No need to remove old floors or recess new ones
- Can be used for thin-bed and medium-bed applications
- Self-bonding and self-healing formula
- Tile can be installed the same day as membrane
- Works with radiant-heated floors and tile warming systems

Recommended For Installation Under:

Thin bed & medium-bed mortar installations (ANSI A118.4) of ceramic, porcelain, stone, marble, slate, and granite tile, pavers, and brick. Hardwood, manufactured wood, commercial grade vinyl and other finished floors are also acceptable; check with manufacturer. Also ideal for use with radiant heated floors and low voltage tile warming systems.

Suitable Substrates:

Concrete: Poured, pre-stressed and pre-cast concrete. Concrete backerboard, mud beds, gypsum, lightweight concrete and patching compounds. **Wood:** Exterior or exposure 1 plywood, APA-rated sheathing, Sturd-I-Floor, hardwood, tongue and groove and OSB with standard face. (Gap between sheathing as required.) **Other Substrates:** Ceramic and porcelain tile, stone, terrazzo, VCT/VAT, metal, radiant-heated, painted and sealed floors and floors damaged by dry shrinkage and structural movement.

- For absorptive surfaces such as moderately hard concrete, mud beds, gypsum/gypcrete, lightweight concrete and patching/leveling compounds, apply Moisture Lock 101™ in accordance with manufacturer's instructions.
- A cementitious parge coat must be applied to concrete block and cured before priming.
- Substrates must be dry, well adhered, and clean of wax, petroleum sealers, dirt, grease, oil or other bond breakers.
- Some concrete boards are not suitable for the application of ECB™ 75 (90mil); check with manufacturer.
- A pull test is required before applying tile to vertical surfaces.
- Refer to current TCNA handbook for additional guidelines.

ECB™ 75 (90mil) Short Form Specifications

Anti-Fracture/Crack-Suppression Membrane

1. **Material:** Provide ECB™ 75 (90mil) elastomeric membrane as manufactured by National Applied Construction Products, Inc., 3200 S. Main St., Akron, OH 44319, (800) 633-4622, www.NACproducts.com, or Architect approved equal.

I. 90 mil (2.29 mm) thick load bearing membrane, capable of 3/8" (9.525 mm) crack suppression

II. Self bonding, pressure sensitive sheet

III. Compatible with most latex modified thinset mortars, epoxies and adhesives.

Provide NAC TAC, NAC TAC II or NS97 Primer (see below for more information). Full floor coverage or material to be installed in a 36" (915 mm) wide strip application over control/saw cut joints as recommended by manufacturer.

2. **Equipment:** Damp mop, industrial vacuum, chalk line, 75-100# roller or flat trowel applying 50 lbs. of pressure/sq. inch, paint roller applicator or brush, hook or razor knife.

3. **Warranty:** National Applied Construction Products, Inc. offers a wide range of Performance and Materials Warranties. Please contact Customer Service for details at 800.633.4622 or visit www.NACproducts.com for more information on warranties.

Technical Data • ECB™ 75 (90mil) Anti-Fracture Membrane

Thickness:	90 mil, ± 5 mil (2.29 mm, ±0.27 mm)
Seams:	Butt joint application
Roll Sizes & Weights:	3' (915 mm) x 50' (15.24 mtr) @ 52 lb (23.58 kg)
Shelf Life:	1 year
Freeze Thaw:	Stable


Property	Test Value	Test Method
Crack Resistance	3/8" (9.525 mm)	NAC Model
Crack Resistance	Rated High Performance	ANSI A118.12
Load Bearing, Bonded Waterproof Membrane	Pass	ANSI A118.10
Shear/Bond	Pass	ANSI A118.12
System Performance	Extra Heavy Duty	ASTM C-627
Impact Insulation Class	65min	ASTM E 492-04
Sound Transmission Class	67min	ASTM E 90-04

*Field Impact Insulation Class 50 FIIC

**Performed on 6 1/2" concrete slab with no ceiling assembly.
For full test results, please contact NAC Corporate Office.*



PRIMER REFERENCE CHART

	INTERIOR APPLICATION			EXTERIOR APPLICATION			
	Below Grade	On Grade	Above Grade	Below Grade	On Grade	Above Grade	Exposed to Elements
NAC TAC	X	X	X		X	X	
NAC TAC II		X	X				
NS97				X	X	X	X

Reference the PRIMER PDS SHEET for complete information of NAC Products, Inc. primers.

NOTES:
