


National Applied Construction Products, Inc. • 800.633.4622 • Fax: 330.644.3557 • www.NACproducts.com

**IMPORTANT:** Proper installation of this Membrane System requires use of the appropriate Primers and Companion Products. Read and understand Install, Product Data (PDS) and Material Safety Data (MSDS) Sheets for all products prior to installation.

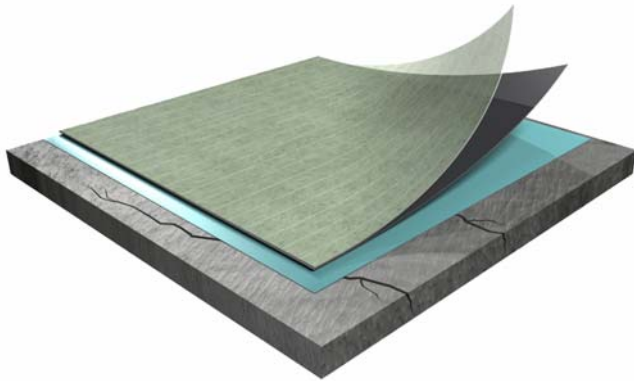

### Advanced Crack Isolation with MYT Resistance

ECB Green Membrane is a recycled, self-bonding, sheet applied elastomeric membrane. It consists of a base layer of polymer modified elastomers permanently laminated to a unique recycled “stress flex” fiber sheet. Together they form a single, high performance, self-bonding membrane.

ECB Green Membrane is designed for use under floor surfaces for LEED & “Green” construction that require protection from structural movement and will protect against Moisture Vapor Transmission (MYT) 10#/1000SF/24HRS. The membrane adheres permanently to the substrate, remains flexible and is guaranteed.

ECB Green Membrane substantially reduces reflective cracking and delamination between the substrate and floor surface. Full floor coverage with 36” ECB Green will protect against 3/8” lateral substrate movement, and because it is a self-bonding system, it is easier to apply and installs faster than other systems. **Once applied, floor tile can be installed immediately, minimizing down time and labor cost.**

### How It Works

The key to ECB Green’s effectiveness is in its two component design. The elastomeric base layer functions as a buffer, absorbing the structural movement of the substrate, while its unique recycled “stress flex” fiber sheet accommodates A118.4 or better latex mortars, organic adhesives and epoxy setting materials. The adhesion and integrity of the tile floor are preserved by the “anti-fracture” action. NAC TAC (Interior) or NS97 (Exterior) Primers are necessary components of NAC Membrane Systems.

### ECB Green Features and Benefits

- Contributes to LEED points
- Meets ANSI A118.12 and ANSI A118.10
- Suitable for interior and exterior use
- Protects against reflective 3/8” cracking and delamination
- Reduces live and dead load failures
- Provides barrier against radon, mold and asbestos
- Resists Moisture Vapor (MYT) 10#/1000SF/24HRS
- Eliminates need to cut tile to meet control/cold joints
- No need to remove old floors or recess new ones
- Can be used for thin-bed and medium-bed applications
- Self-bonding and self-healing formula
- Tile can be installed the same day as membrane
- Works with radiant-heated floors and tile warming systems

### Recommended For Installation Under:

Thin bed & medium-bed mortar installations (ANSI A118.4) of ceramic, porcelain, stone, marble, slate, and granite tile, pavers, and brick. Hardwood, manufactured wood, commercial grade vinyl and other finished floors are also acceptable; check with manufacturer. Also ideal for use for LEED projects, radiant heated floors and low voltage tile warming systems.

### Suitable Substrates:

**Concrete:** Poured, pre-stressed and pre-cast concrete. Concrete backerboard, mud beds, gypsum, lightweight concrete and patching compounds. **Wood:** Exterior or exposure 1 plywood, APA-rated sheathing, Sturd-I-Floor, hardwood, tongue and groove and OSB with standard face. (Gap between sheathing as required.) **Other Substrates:** Ceramic and porcelain tile, stone, terrazzo, VCT/VAT, metal, radiant-heated, painted and sealed floors and floors damaged by dry shrinkage and structural movement.

- For absorptive surfaces such as moderately hard concrete, mud beds, gypsum/gypcrete, lightweight concrete and patching/ leveling compounds, apply 101 Floor Prep in accordance with manufacturer’s instructions.
- A cementitious parge coat must be applied to concrete block and cured before priming.
- Substrates must be dry, well adhered, and clean of wax, petroleum sealers, dirt, grease, oil or other bond breakers.
- Some concrete boards are not suitable for the application of ECB; check with manufacturer.
- A pull test is required before applying tile to vertical or overhead surfaces.
- Refer to current TCNA handbook for additional guidelines.

## “ECB Green” Short Form Specifications

### Anti-Fracture/Crack-Suppression Membrane

1. **Material:** Provide ECB Green elastomeric membrane as manufactured by National Applied Construction Products, Inc., 3200 S. Main St., Akron, OH 44319, (800) 633-4622, [www.NACproducts.com](http://www.NACproducts.com), or Architect approved equal.

I. 40 mil thick load bearing membrane, capable of 3/8” crack suppression with recycled fabric topping

II. Self bonding, pressure sensitive sheet

III. Compatible with most latex modified thinset mortars, epoxies and adhesives.

Provide NAC TAC Primer for interiors or NS97 Primer for exteriors/wet areas. Full floor coverage or material to be installed in a 36” wide strip application over control/saw cut joints as recommended by manufacturer and in 12” or 24” wide strip applications over cracks.

2. **Equipment:** Damp mop, industrial vacuum, chalk line, 75-100# roller or flat trowel applying 50 lbs. of pressure/sq. inch, paint roller applicator or brush, hook or razor knife.

3. **Warranty:** National Applied Construction Products, Inc. Lifetime Fracture-Free Performance Warranty in writing for full floor coverage projects or Lifetime Limited Material Warranty for strip applications.

### Technical Data • ECB Green Anti-Fracture Membrane

<b>Thickness:</b>	40 mil, ± 5 mil
<b>Seams:</b>	Butt joint application
<b>Roll Sizes &amp; Weights:</b>	1' (305 mm) x 50' (15.24 m) @ 17 lb (7.7 kg) 2' (610 mm) x 50' (15.24 m) @ 34 lb (15.5 kg) 3' (915 mm) x 50' (15.24 m) @ 50 lb (22.7 kg)
<b>Shelf Life:</b>	1 year
<b>Freeze Thaw:</b>	Stable

Property	Test Value	Test Method
FHA 4900.1	Pass, 3' Head (914 mm)	ASTM D-583
Crack Resistance	3/8" (9.5 mm)	NAC Model
System Crack Resistance	Rated High Performance	ANSI A118.12
Load Bearing, Bonded Waterproof Membrane	Pass	A118.10
Shear/Bond	Pass	A118.12
Impact Resistance	Pass*	Mil-D-3134J
System Performance	Extra Heavy Duty	ASTM C-627

### ECB Green LEED Certification Data

Measurement Specification	Credit	Points
**Recycled Materials - 10%	MR 4.1	1
**Recycled Materials - 20%	MR 4.2	1
Regional Materials (500 miles) - 10%	MR 5.1	1
Regional Materials (500 miles) - 20%	MR 5.2	1

### NAC TAC, NS-97 Primer, 101 Floor Prep & SubSeal LEED Data

Low-Emitting Materials, Adhesives & Sealants	EQ 4.1	1
Low-Emitting Materials, Adhesives & Sealants	EQ 4.2	1

\* Modified for ceramic tile. 2 lb. (.91 kg) ball dropped 8' (2.44 m) on an 8" x 8" (203 mm) porcelain tile bonded to ECB & Strataflex.

\*\* Pending Third Party Certification (Est. date of completion 9/1/09)



**Warranty Information:** National Applied Construction Products, Inc. offers two warranties on its sheet-applied systems: a Lifetime Limited Material Warranty for strip applications and a Lifetime Fracture-Free Performance Warranty for full floor coverage. Please contact Customer Service for details at 800.633.4622 or download the complete warranty statements, registration and claim forms at [www.NACproducts.com](http://www.NACproducts.com).

NOTES: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_